


29/50/144/430 MHz FM QUAD BAND TRANSCEIVER

FT-8900R

29/50/144/430 MHz
QUAD BAND

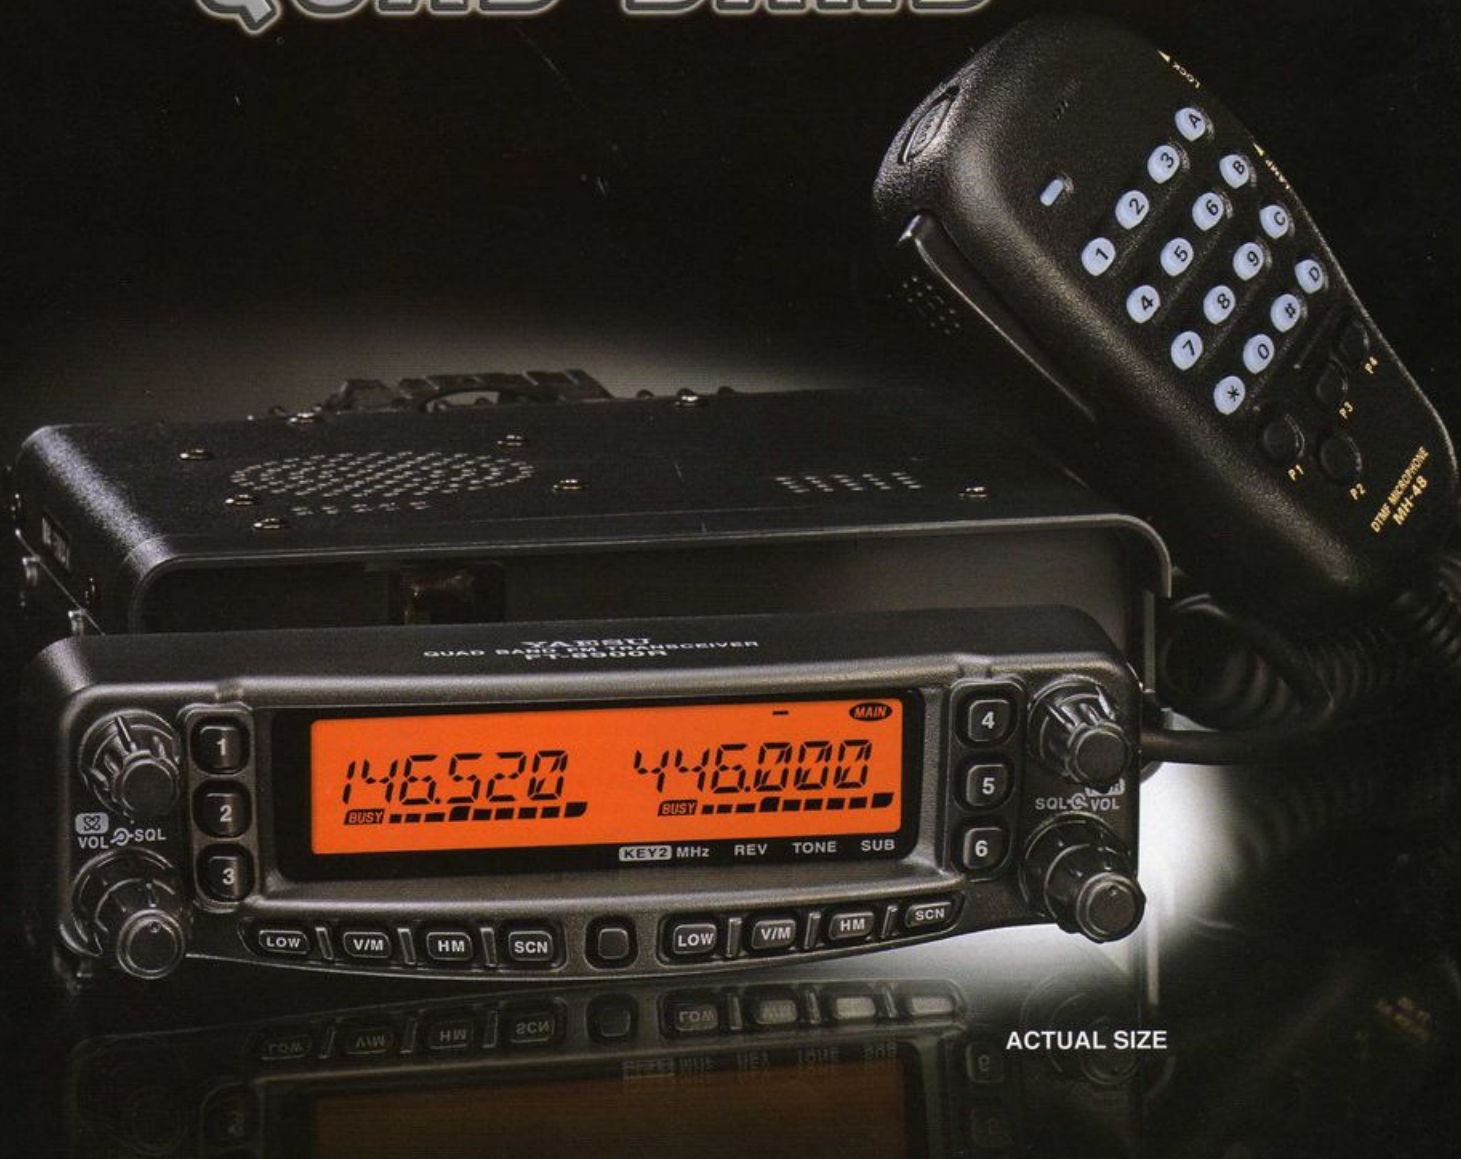

ACTUAL SIZE

YAESU
Choice of the World's top DX'ersSM

General
Frequency Range: RX: 28.000 - 29.700 MHz, 50.000 - 54.000 MHz, 108.000 - 180.000 MHz, 320.000 - 480.000 MHz, 700 - 985 MHz (Cellular Blocked)
 TX: 28.000 - 29.700 MHz, 50.000 - 54.000 MHz, 144.000 - 146.000 MHz (or 144.000 - 148.000 MHz), 430.000 - 440.000 MHz (or 430.00 - 450.000 MHz)
Frequency Steps: 5/10/12.5/15/20/25/50 kHz
Operating Modes: F3, F2
Antenna Impedance: 50 Ohms, unbalanced (Antenna Duplexer built-in)
Frequency Stability: ±5 ppm @ 14° F ~ +140° F (-10 °C ~ +60 °C)
Operating Temperature Range: -4° F ~ +140° F (-20 °C ~ +60 °C)
Supply Voltage: 13.8 VDC (±15%), negative ground
Current Consumption (Approx.): RX: 0.5 A (Squelched)
 TX: 8.0 A (50/430 MHz), 8.5 A (29/144 MHz)

Case Size (W x H x D): 5.5" x 1.6" x 6.6" (140 x 41.5 x 168 mm) (w/o knobs & connectors)
Weight (Approx.): 2.2 lb (1 kg)
Transmitter
Power Output: 50/20/10/5 W (29/50/144 MHz), 35/20/10/5 W (430 MHz)
Modulation Type: Variable Reactance
Maximum Deviation: ±5 kHz
Spurious Radiation: Better than -60 dB (29 MHz: Better than -50 dB)
Modulation Distortion: Less than 3%
Microphone Impedance: 2 kΩ
DATA Jack Impedance: 10 kΩ

Receiver
Circuit Type: Double-conversion superheterodyne
Intermediate Frequencies: 45.05 MHz/450 kHz (Left band), 47.25 MHz/450 kHz (Right band)
Sensitivity (for 12dB SINAD): Better than 0.2 μV
Squelch Sensitivity: Better than 0.16 μV
Selectivity (-6dB/-60dB): 12 kHz/30 kHz
Maximum AF Output: 2 W @ 8 Ω for 5% THD
AF Output Impedance: 4-16 Ω

Specifications are subject to change without notice, and are guaranteed within the 29, 50, 144, and 430 MHz amateur bands only. Frequency ranges will vary according to transceiver version; check with your dealer.

UP/DOWN Keys: Provide VFO channel stepping or Memory Channel selection.

DTMF/Direct Freq. Input

DIAL Knob (Left Band) Frequency Selection Main/Sub Band Selection

Hyper Memory Selection Keys

PTT Switch: Press to Transmit.

DIAL Knob (Right Band) Frequency Selection Main/Sub Band Selection

P3 Programmable Key Default function: same as TONE key.

P4 Programmable Key: Default function: same as LOW key.

P2 Programmable Key Default function: same as V/M Key

P1 Programmable Key Default function: same as BAND Key.

Volume Knob (Left Band)

WIRES Internet Key

Squelch Knob (Left Band)

Left Band Display Field

Right Band Display Field

Set Mode Key

Volume Knob (Right Band)

Squelch Knob (Right Band)

Left Band Command Keys

Right Band Command Keys

Available functions of Programmable Microphone Keys:

SQL OFF	Opens squelch to allow reception of weak signals.
RPTR	Allows setting of repeater shift.
PRI	Activates Priority Channel operation.
LOW	Sets transmitter output power level.
MHz	Configures Main Dial for tuning in 1 MHz steps.
REV	Allows reversal of uplink/downlink frequencies.
HOME	Activates Home Channel operation.
BAND	Toggles Main and Sub bands on display.
VFO/MR	Toggles operation between VFO and Memory modes.
SCAN	When the "Main" band is set to the Memory mode, press and hold in this button for 1/2 second to set up the Scan Skip List or Preferential Scan List.

OPTIONS

MH-48A6J DTMF Microphone (supplied in U.S.A. version)	MH-42B6JS Hand Microphone (supplied w/European and Asian versions)	MLS-100 High-Power External Speaker	YSK-8900 Separation Kit	MMB-62 Remote Front Panel Mounting Bracket	MEK-2 Microphone Extension Kit (for use with Yaesu 8-pin Microphones)	CT-39A Packet Interface Cable	FP-1023 (U.S.A. only) AC Power Supply (25 A)
							FP-1030A AC Power Supply (30 A)

About this brochure: we have made this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time in equipment, optional accessories, specifications, model numbers, and availability. Precise frequency range may be different in some countries. Some accessories shown herein may not be available in some countries. Some information may have been updated since the time of printing; please check with your Authorized Yaesu Dealer for complete details.

YAESU VERTEX STANDARD CO., LTD.
 4-8-8 Nakameguro, Meguro-ku, Tokyo 153-8644, Japan

VERTEX STANDARD Phone 714/827-7600; Fax 714/827-8100
 Email: amateursales@vxstdusa.com

For the latest Yaesu news, visit us on the Internet:
<http://www.vxstdusa.com> <http://www.yaesu.co.uk>

US Headquarters
 10900 Walker Street, Cypress, CA 90630, U.S.A.
International Division
 8350 N.W. 52nd Terrace, Suite 201, Miami, FL 33166, U.S.A.

YAESU EUROPE B.V.
 P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

YAESU UK LTD. Email: sales@yaesu.co.uk
 Unit 12, Sun Valley Business Park, Winnall Close
 Winchester, Hampshire, SO23 0LB, U.K.

VERTEX STANDARD HK LTD.
 Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,
 Kwun Tong, Kowloon, Hong Kong