

# VX-160 SERIES

## VHF/UHF Portable Radios

### Rugged, Durable Portables

- LIGHT WEIGHT AND COMPACT SIZE
- 16 CHANNEL CAPACITY
- 5 WATTS POWER OUTPUT  
(Selectable to 1 Watt)
- MIL-STD 810 C/D/E
- RUGGED CONSTRUCTION
- LOUD, CLEAR AUDIO OUTPUT
- 12.5/25 kHz BANDWIDTH  
PROGRAMMABLE BY CHANNEL
- CTCSS/DCS ENCODE + DECODE
- DTMF ANI
- DUAL 2-TONE DECODE
- MULTI-MODE SCAN  
(incl. Dual Watch, Priority, Follow-Me)
- ARTS™ (Auto-Range Transponder System)
- BCLO, BTLO, AND TOT FUNCTIONS
- TX/RX BATTERY SAVER CIRCUIT
- PC PROGRAMMING
- RADIO-TO-RADIO CLONING



Actual Size

**SUPER RUGGED CONSTRUCTION**

Housed inside a high-impact case, the diecast chassis of the VX-160 provides a solid, rugged foundation for the VX-160's circuitry. Built to survive in the real world of factory, construction site, or fleet use, the VX-160 will provide many years of reliable communications.

**CTCSS / DCS ENCODE + DECODE**

High-performance Encoder/Decoder circuits for both CTCSS and Digital Code Squelch are provided, for access to tone/code controlled systems. DCS is ideal for crowded RF environments, providing superior immunity from false opening of squelch.

**DTMF ANI**

The VX-160 includes a DTMF Automatic Number Identifier (ANI) circuit, which will respond to an incoming ANI burst for selective paging of an individual portable.

**VERSATILE SCANNING FEATURES**

The high-speed scanning capability of the VX-160 includes "All-Channel" scanning, plus Dual Watch and Priority Channel capability. And with "Follow-Me" scanning, a designated channel will be watched during scanning of other channels.

**DUAL 2-TONE DECODE**


This built-in feature allows you to decode up to two, 2-tone pairs per channel. These can be used for two individual pager calls, or one for Individual and one for Group call.

**BCLO, BTLO, AND TOT**

To facilitate efficient channel management, the VX-160 provides Busy Channel Lock-Out (BCLO) and Busy Tone Lock-Out (BTLO) features. What's more, the transmitter's Time-Out Timer (TOT) function prevents a "stuck microphone" condition from jamming a channel for an extended period of time.

**ARTS™ (Auto Range Transponding System)**

Included in the VX-160 is Vertex Standard's exclusive ARTS™ feature, which can be critically important in search-and-rescue applications. ARTS™ provides a "hand-shake" with other ARTS™-equipped transceivers, and the display indicates if an "Out of Range" condition exists. The base station can then alert the field unit to move to a better location.

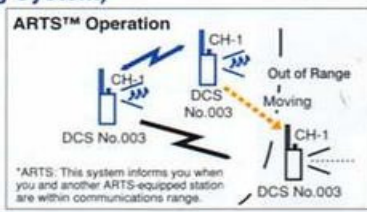

**TX/RX BATTERY SAVER CIRCUIT**

To maximize battery life, the VX-160 includes both transmit- and receive-mode battery savers. On transmit, the portable will reduce power when the incoming signal is very strong. On receive, the radio will put itself into a pulsing "sleep" mode, periodically checking for channel activity.

**PC PROGRAMMING**

The channel and feature configurations are easily programmed in minutes by the dealer, using the optional CT-42A Programming Cable and CE44 Programming Software.

**RADIO TO RADIO CLONE FEATURE**

For quick programming of VX-160 radios for fleet use, the "Clone" feature allows copying of all channel and other configuration data from one VX-160 to another, using the optional CT-27 Cloning Cable.

**500 mW AUDIO OUTPUT**

Ideal for reception in noisy environments, the VX-160's high-powered audio is coupled to a large internal speaker, assuring solid copy throughout difficult construction site or field operations.

**MIL-STD 810 C/D/E**

Built to meet or exceed the requirements of the U.S. MIL-STD 810 C/D/E standards, the VX-160 is designed to survive under difficult operating conditions of shock, vibration, and driving rain. Cost-performance begins with durability, and the Mil-Spec toughness of the VX-160 is your guarantee of its design quality.



**APPLICABLE MIL-STD**

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures
Low Pressure		500.2/Procedure I	500.3/Procedure I
High Temperature		501.2/Procedure I, II	501.3/Procedure I, II
Low Temperature		502.2/Procedure I, II	502.3/Procedure I, II
Temperature Shock		503.2/Procedure I	503.3/Procedure I
Solar Radiation		505.2/Procedure I	505.3/Procedure I
Rain		506.2/Procedure II	506.3/Procedure II
Humidity		507.2/Procedure II	507.3/Procedure II
Salt Fog		509.2/Procedure I	509.3/Procedure I
Dust		510.2/Procedure I	510.3/Procedure I
Vibration	514.2/Procedure VIII	514.3/Procedure I, Cat. 10	514.4/Procedure I, Cat. 10
Shock	516.2/Procedure I	516.3/Procedure I, IV	516.4/Procedure I, IV

**Specifications**

	VX-160V	VX-160U
<b>General Specifications</b>		
Frequency Range	134-160 MHz (A) 148-174 MHz (C) 142-176 MHz (CS1)	400-430 MHz (AS1) 440-470 MHz (CS) 450-490 MHz (D) 485-512 MHz (F)
Number of Channels	16 Channels	
Channel Spacing	12.5/25 kHz	
PLL Steps	2.5/6.25 kHz	5/6.25 kHz
Power Supply Voltage	7.5 VDC ± 20 %	
Battery Life (5-5-90 duty)		
w/FNB-V57(1100 mAh)	8.2 hrs. (9.9 hrs. w/saver) @5 W	7.1 hrs. (8.5 hrs. w/saver) @5 W
w/FNB-64(700 mAh)	5.2 hrs. (6.3 hrs. w/saver) @5 W	4.5 hrs. (5.4 hrs. w/saver) @5 W
Operating Temperature Range	-22° F to +140° F (-30° C to +60° C)	
Frequency Stability	±2.5 ppm	
Dimensions	2.3" (W) X 4.7" (H) X 1.2" (D) [58X120X31 mm]	
Weight (Approx)	0.81 lb. (365 g) w/FNB-64	

Measurements per EIA standards unless noted above. Specifications subject to change without notice or obligation.

	VX-160V	VX-160U
<b>Receiver Specifications</b>		
Measurements made per EIA standard TIA/EIA-603		
Sensitivity		
EIA 12 dB SINAD	0.20 µV	0.25 µV
20 dB Quieting	0.30 µV	0.35 µV
Adjacent Channel Selectivity	65 dB (25 kHz) / 60 dB (12.5 kHz)	
Intermodulation	65 dB	
Spurious and Image Rejection	65 dB	
Hum & Noise	45 dB	
Audio Output	500 mW @4 Ohms, 5 % THD	
<b>Transmitter Specifications</b>		
Measurements made per EIA standard TIA/EIA-603		
Power Output	5.0/1.0 W	
Modulation	16K0F3E, 11K0F3E	
Conducted Spurious Emissions	60 dB Below Carrier	
FM Hum & Noise	40 dB	
Audio Distortion (@1 kHz)	<5 %	

**Accessories & Options**

<b>FNB-64</b> 7.2 V 700 mAh Ni-Cd Battery Pack	<b>FNB-V57</b> 7.2 V 1100 mAh Ni-Cd Battery Pack	<b>FBA-25</b> Alkaline Battery Case(6 X AA)	<b>VAC-6800</b> 6-unit Multi Charger	<b>VCM-1</b> Mobile Mounting Bracket for VAC-800	<b>MH-37A48</b> Earpiece/Microphone	<b>LCC-180 / S</b> Leather Case(S for swivel belt clip)	<b>CT-27</b> Radio to Radio Programming Cable
<b>FNB-V67LI</b> 7.4 V 1600 mAh Lithium-Ion Battery Pack	<b>VAC-800B/C/U*</b> for FNB-64 V57 <b>VAC-810B/C/U*</b> for FNB-V67LI Desktop Rapid Charger	<b>NC-77B/C/U*</b> Not for FNB-V67LI Overnight Desktop Charger	<b>MH-45B48</b> Speaker/Microphone (Noise Cancelling)	<b>VC-25</b> VOX Headset	<b>CE44</b> Programming Software	<b>CT-42A</b> Radio Programming Cable	

\*B for 120 VAC/ C for 240 VAC/ U for 230 VAC



**VERTEX STANDARD CO., LTD.**

4-8-8 Nakameguro, Meguro-ku, Tokyo 153-8644, Japan

For our latest product news, visit us on the Internet: <http://www.vxstd.com>

**VERTEX STANDARD** <http://www.vxstdusa.com>

**US Headquarters**

10900 Walker Street, Cypress, CA 90630, U.S.A.

**YAESU EUROPE B.V.**

P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

<http://www.yaesu.co.uk>  
Email: [sales@yaesu.co.uk](mailto:sales@yaesu.co.uk)

**YAESU UK LTD.**

Unit 12, Sun Valley Business Park, Winnall Close  
Winchester, Hampshire, SO23 0LB, U.K.

**VERTEX STANDARD HK LTD.** <http://www.vxstd.com.hk>

Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,  
Kwun Tong, Kowloon, Hong Kong